

6 IN. MICROFILTRATION CONTINUOUS HANGER FOR GUTTERS

PRODUCT

- Product for new rain gutters
- Protects from debris, snow and ice
- Supports 425 lb (193 kg)/linear foot
- Uniform support across the entire length
- Shell structure
- Lifetime anti-clog warranty
- Lifetime guarantee on material and sturdiness
- Invisible from the ground
- Package contains:
 - 7.5' (2.29 m) x 24 pcs = 180' (54.86 m)
 - 200 screws (see description below)
 - 12 end trims (see description below)

TOP-LAYER ALUMINUM


- Colour: Black
- Grade: 3105 H24
- Thickness: 0.0175" (including finish)

BOTTOM-LAYER ALUMINUM

- Colour: aluminum
- Grade: 3105 H24
- Thickness: 0.014" (including finish)


TOP-LAYER PERFORATIONS

- 7/64" (2.8 mm) in diameter
- Drains 49.2" (1250 mm) of water per hour per linear foot
- Offers the perfect balance between maximum drainage and debris protection

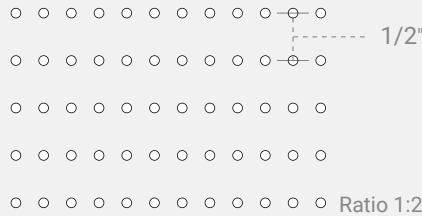

BOTTOM-LAYER PERFORATIONS

- 1 1/4" (31.75 mm) by 0.267" (6.8 mm)
- Surface tension increases drainage
- Block access to fine debris

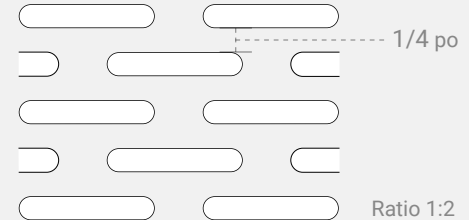


View the results of our drainage, resistance, and wind tunnel tests at www.alu-rex.com/en/tests.

Tolerances

x.xxx" = +/- 0.005" (0.127 mm)


x.xxxx" = +/- 0.0005" (0.0127 mm)

6" GUTTER PROFILE

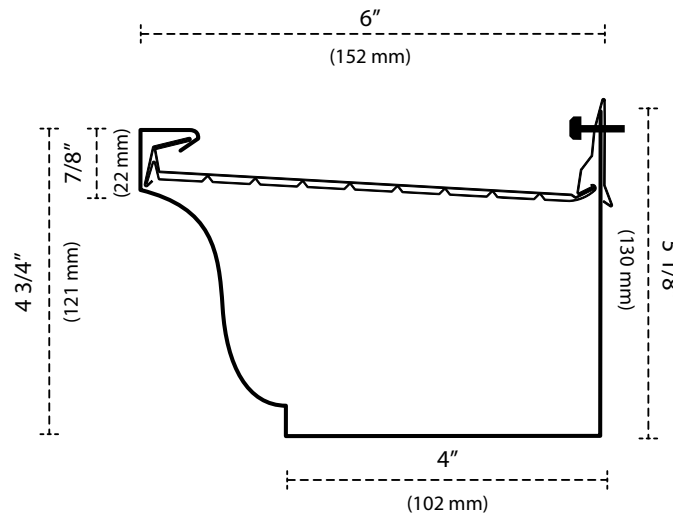

This product is protected by a number of patents.

PROFILE

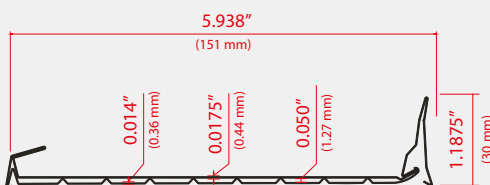

SCREWS

- This hanger is installed with black Dracotized® self-sealing screws made of zinc #10 - 1 1/2" (38 mm) with 1/4" (6.4 mm) hexagon heads and integrated rubber gaskets.



END TRIMS

- At the end cap of the gutter, an end trim is installed to leave a gap for the gutters heat distortion.

